

INSTALLATION INSTRUCTIONS

BEFORE INSTALLING OR ADJUSTING THIS PRODUCT, PLEASE READ THESE INSTRUCTIONS CAREFULLY. PLEASE KEEP THIS GUIDE FOR FUTURE REFERENCE



HCM Installation Instructions

1.0 SCOPE


This document provides installation instruction on Horizontal Cable Manger.

2.0 PRODUCT DESCRIPTION

This is 1U & 2U Horizontal cable manger.

3.0 PROCEDURE

3.1 ASSEMBLY INSTRUCTIONS

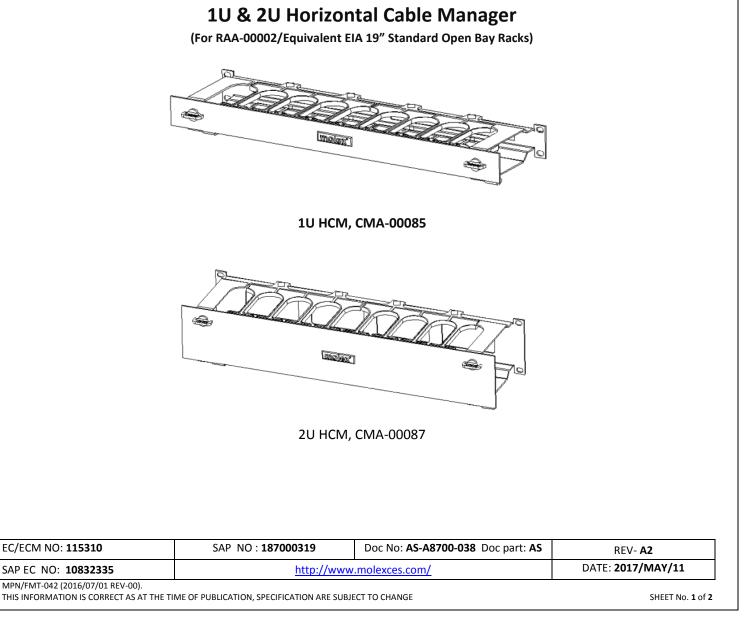


1. Parts List for 1 U and 2 U Horizontal Cable Manager


- a. Pre-Assembled 1 U or 2 U Horizontal Cable Manager x 1Pc
- b. 1 U or 2 U Door Assembly x 1 Pc
- c. CUP WASHER x 4 Pc
- d. SCREW M6X16 CH HD SLT CHEM BLK x 4Pc
- e. CAGED NUT M6 SMG 06/1/71/448' x 4Pc
- f. Black Washer x 4 Pc
- g. 12-24 x 1/2 PHIL PHMS BLACK SCREW x 4 Pc

2. Installation of 1 U and 2 U Horizontal Cable Manager

The CMA-00085/87 can be used in-conjunction with the Molex RAA-00002 or an EIA equivalent 19 Inch Rack

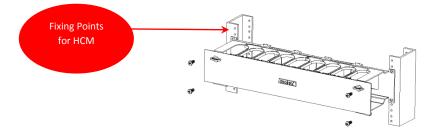

- Align holes on fixing plate of the Horizontal Cable Manager with screw holes at the desire position on the open bay rack, making sure all 4 holes are aligned and clear to fit screw.
- Install the HCM to the open rack with the screws provided.

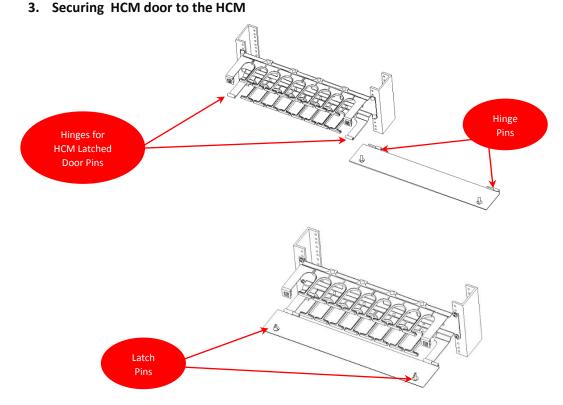

- Having installed the HCM to the rack allows for both free hands to secure the door.
- To installed the HCM Latched Door slide the Hinge Pins into the Hinge on the body of the HCM
- To lock the door move upwards and with align door with latch pin holes on the body of the HCM
- Activate latch pins by folding pins down

4. Opening of HCM Door

1. Open door by deactivating Latch Pins and fold door downwards

EC/ECM NO: 115310	SAP NO : 187000319	Doc No: AS-18700-038 Doc part: AS	REV- A2
MPN/FMT-042 (2016/07/01 REV-00).			SHEET No. 2 of 2